

CHAIN

SK RAIL **ROLLER CHAIN**

Rail Code	Rail Length	Travel Length	2-Part Available
SK11	3080 mm	2475 mm	•
SK12	3330 mm	2725 mm	•
SK13	4090 mm	3485 mm	•

Increased lengths up to 6.5m available upon request

SUITABLE FOR USE WITH THE FOLLOWING OPERATORS

220.2	250.2	250.2 SP	252.2	257
•	•	•	•	•

The SK rail is recommended on low usage applications up to 175kg

SK S RAIL **ROLLER CHAIN — 50% INCREASED STRENGTH**

Rail Code	Rail Length	Travel Length	2-Part Available
SK11	3080 mm	2475 mm	-
SK12	3330 mm	2725 mm	-
SK13	4090 mm	3485 mm	-


Increased lengths up to 6.5m available upon request

SUITABLE FOR USE WITH THE FOLLOWING OPERATORS

220.2	250.2	250.2 SP	252.2	257
•	•	•	•	•

The SK S rail is recommended on high usage applications and those over 175kg

BELT

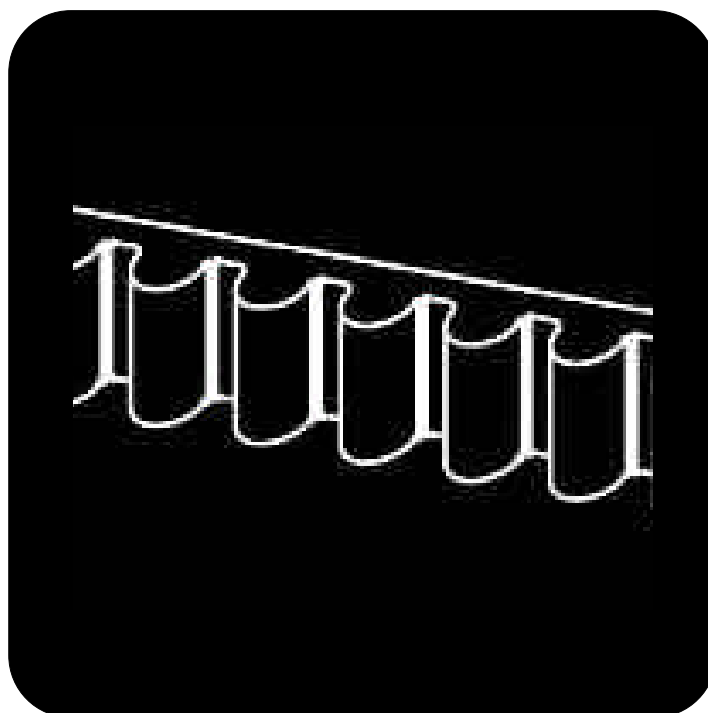

SZ RAIL TOOTHED DRIVE BELT

The SZ rail is recommended on low usage applications up to 175kg

Rail Code	Rail Length	Travel Length	2-Part Available	
SZ11	3080 mm	2475 mm	•	
SZ12	3330 mm	2725 mm	•	
SZ13	4090 mm	3485 mm	•	
Increased lengths up to 6.5m available upon request				
SUITABLE FOR USE WITH THE FOLLOWING OPERATORS				
220.2	250.2	250.2 SP	252.2	257
•	•	•	•	•

SZ S RAIL TOOTHED DRIVE BELT — 50% INCREASED STRENGTH

The SZ S rail is recommended on high usage applications and those over 175kg

Rail Code	Rail Length	Travel Length	2-Part Available	
SZ11	3080 mm	2475 mm	-	
SZ12	3330 mm	2725 mm	-	
SZ13	4090 mm	3485 mm	-	
Increased lengths up to 6.5m available upon request				
SUITABLE FOR USE WITH THE FOLLOWING OPERATORS				
220.2	250.2	250.2 SP	252.2	257
•	•	•	•	•