


CDO-50

Hazardous Area Equipment for Sprung Shutters.
Braked versions available for Unsprung shutters on request.
Suitable For Zone 1, 2, 21 & 22 GD Protection

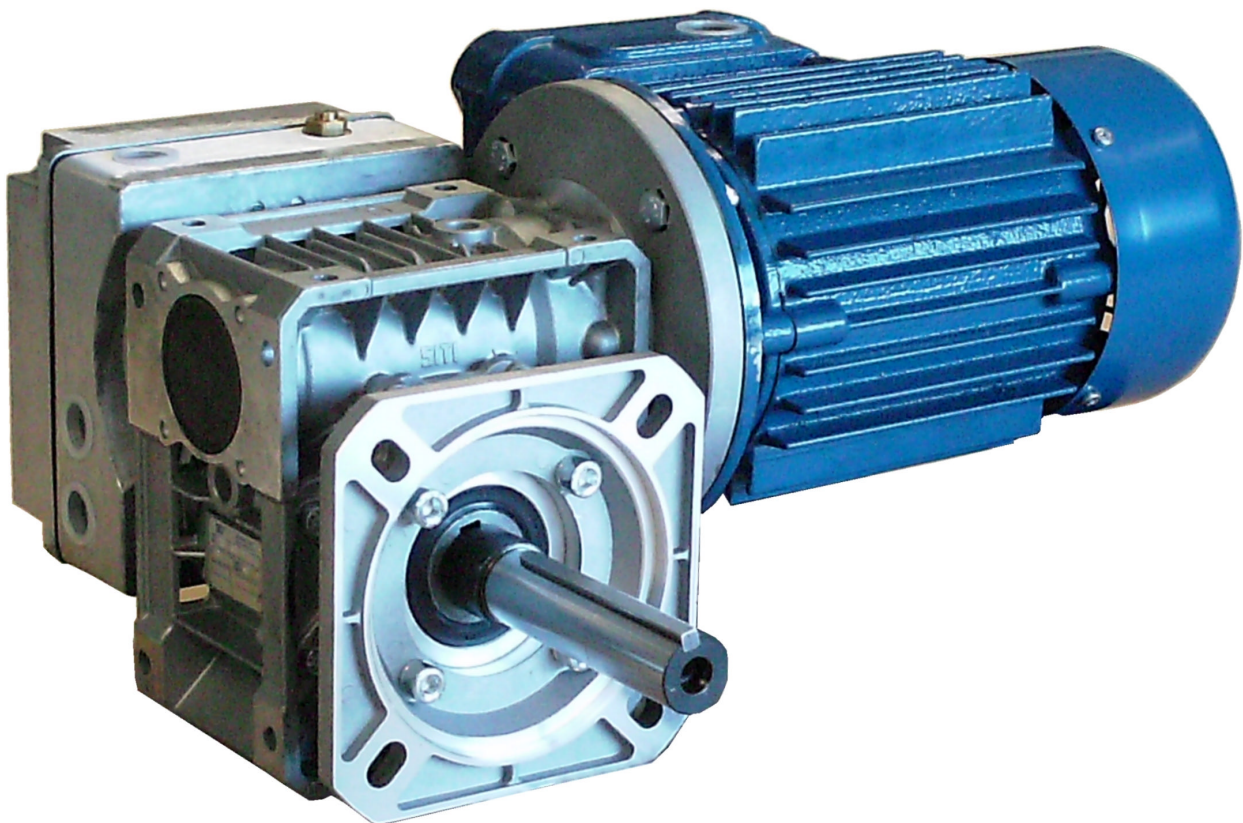

Special Features

- * I.P. 54 Environment Protection
- * Phosphor Bronze Worm Wheel
- * High Starting Torque - Industrial Duty Motor
- * Explosion Proof Motor
- * Industry Standard 1" Shaft
- * Also IIC, T4 Available on Request
- * Handcrank Operation

Please Contact Our Sales Department On 01928 579050 For Further Information

PRODUCT DESCRIPTION

The CDO-50 Explosion Proof Operator is available in 0.37kW power size with 400V Three Phase Explosion Proof motor. This model uses an industrial duty motor and hence provides high starting torque. It is also fitted with an industry standard 1" shaft which enables to use conventional driving accessories.

TECHNICAL INFORMATION

Data	Type	CDO-50
Power (kW)		0.37
Output Speed (R.P.M.)		24
Environmental Protection		I.P.54
Current (Amps)		1.1
Power Supply		400v/3ph/50Hz

OPERATOR DIMENSIONS

