


TVRF-50

Hazardous Area Equipment for Sprung Shutters.
Suitable For Zone 1, 2, 21 & 22 GD Protection

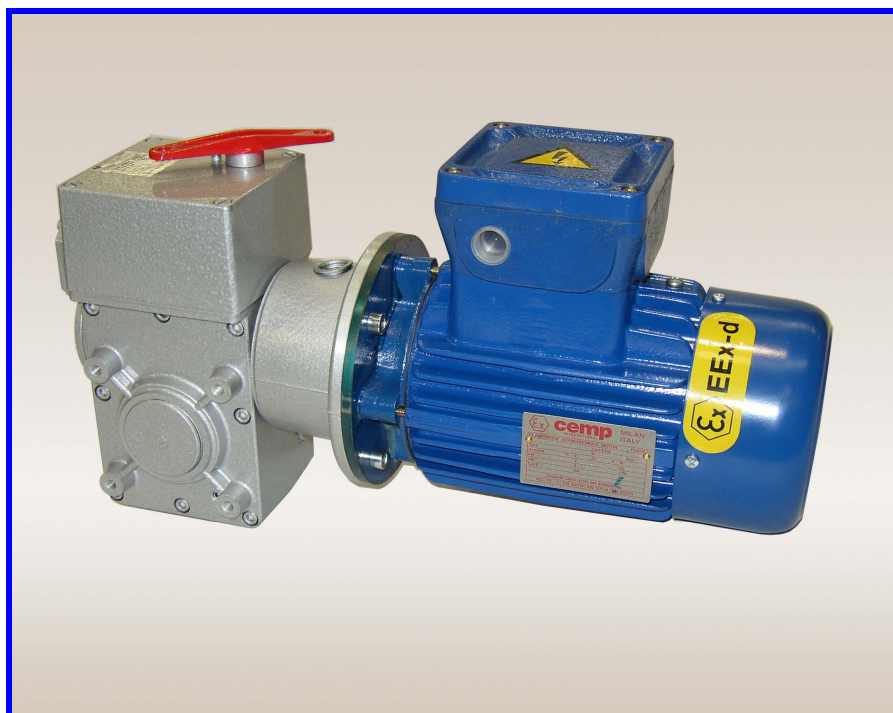

Special Features

- * I.P. 54 Environment Protection
- * Phosphor Bronze Worm Wheel
- * High Starting Torque - Industrial Duty Motor
- * Explosion Proof Motor
- * Industry standard 1" Shaft
- * Also IIC, T4 Available on Request
- * Disengage Clutch

Please Contact Our Sales Department On 01928 579050 For Further Information

PRODUCT DESCRIPTION

The TVRF Explosion Proof Operator is available with A 0.37 kW 400v Three Phase Explosion Proof motor. This model is fitted with a Disengage Clutch which enables the sectional door to be manually operated when required.

TECHNICAL INFORMATION

Data	Type	TVRF-50 c/w Disengage Clutch
Power (kW)		0.37
Output Speed (R.P.M.)		31
Environmental Protection		I.P.54
Current (Amps)		1.1
Power Supply		400v/3ph/50Hz

OPERATOR DIMENSIONS :- TVRF-50 c/w Disengage Clutch

