


## CDO-150 Heavy Duty Flangemount Operator

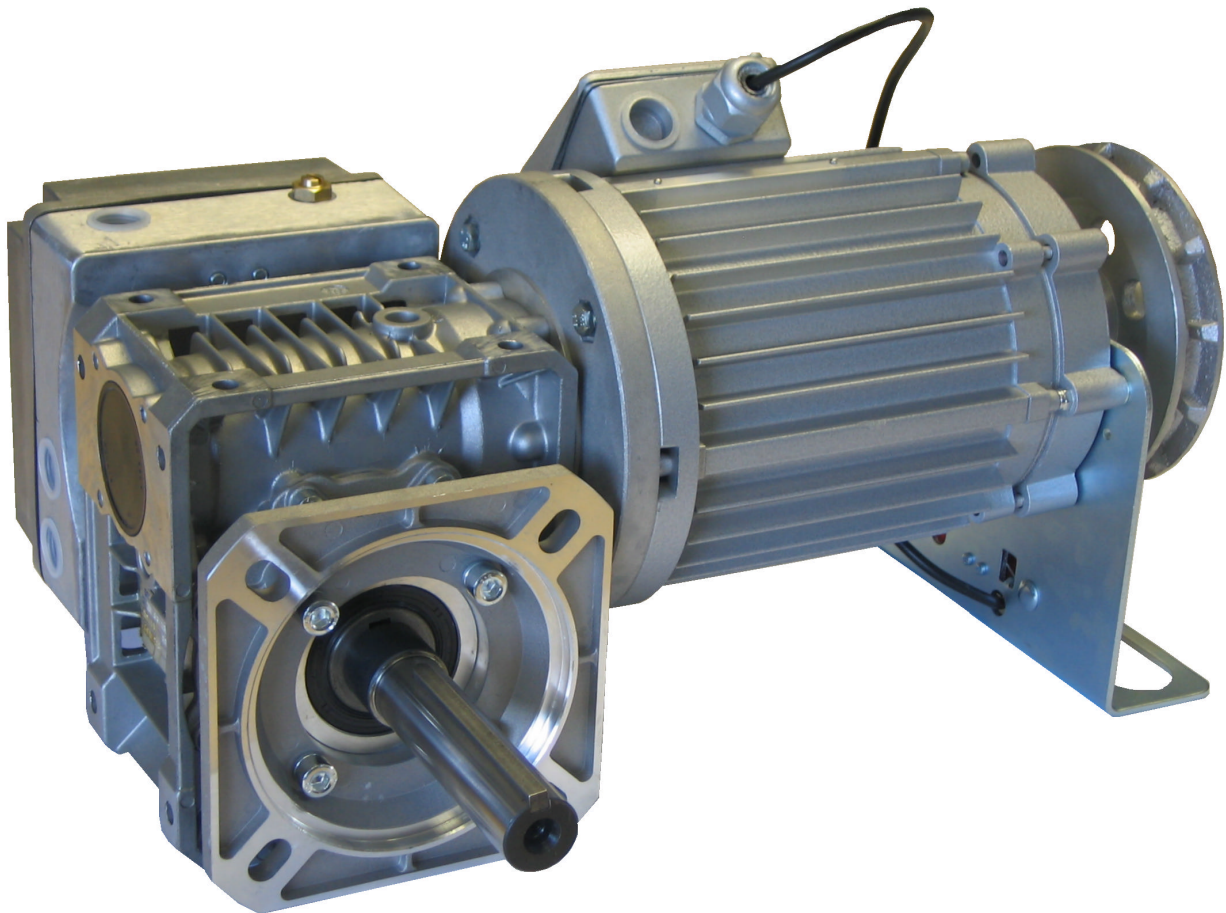

### Special Features

- \* Safety Interlock Switch for manual operation
- \* Integral Thermal Protection
- \* 1" industry standard output shaft
- \* IP 54 Environment Protection
- \* Gear driven Limit Switches
- \* Phosphor bronze Worm Wheel
- \* High Starting Torque Industrial Duty Motor
- \* Integral Brake

Please Contact Our Sales Department On 01928 579050 For Further Information

## PRODUCT DESCRIPTION

The CDO-150 HD Rolling Door Operator is available with 1.1kw, 400v Three Phase Brake Motor. This model can be fitted with a Hand Crank, High Level or Floor Level Hand Chain System which enables the roller shutter door to be manually opened & closed when required.

## TECHNICAL INFORMATION

Data \ Type	CDO-150 HD 3PH c/w Hand Crank	CD0-150 HD 3PH c/w Floor Level Hand Chain	CD0-150 HD 3PH c/w High Level Hand Chain
Power (kW)	1.1		
Torque (Nm)	197 / 110		
Output Speed (R.P.M.)	24 / 45		
Environmental Protection	I.P.54		
Current (Amps)	3.1		
Power Supply	400v/3ph/50Hz		

## OPERATOR DIMENSIONS:- CDO-150 HD 3ph c/w High Level Hand Chain

