


## VRL-200 Heavy Duty Flangemount Operator

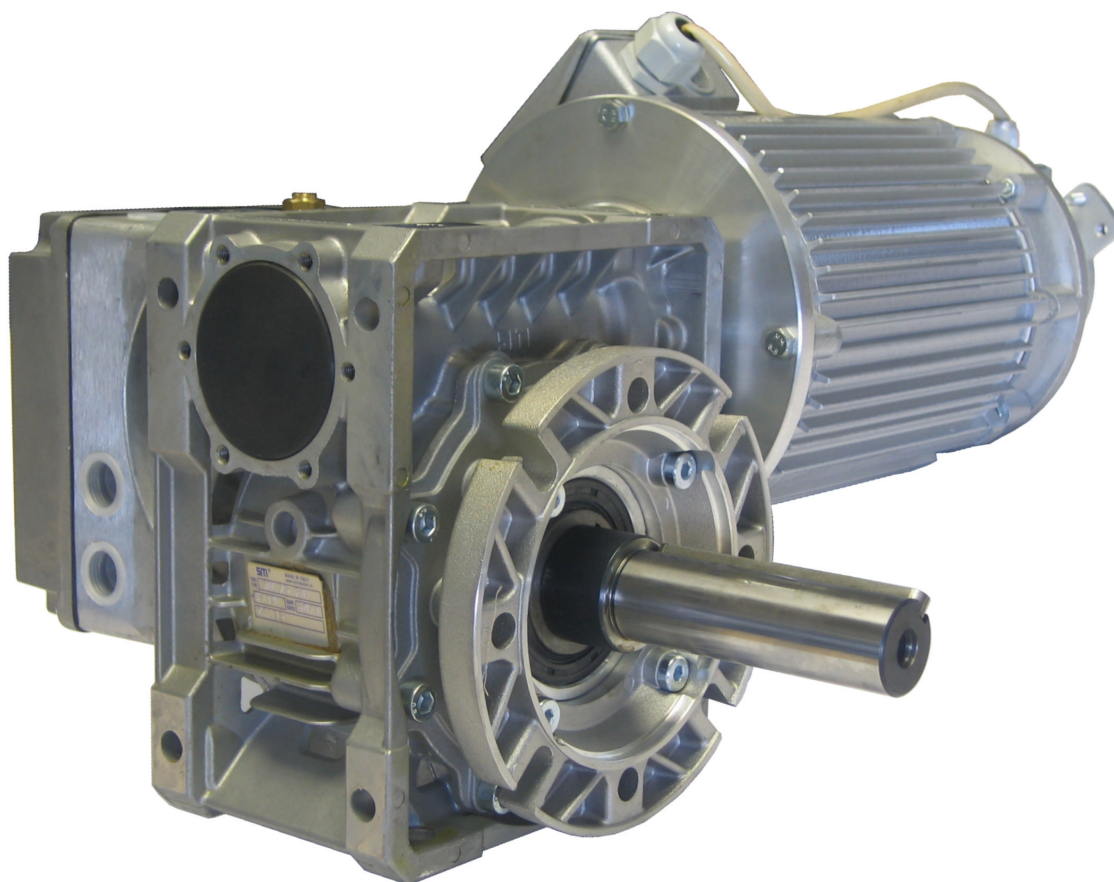

### Special Features

- \* Safety Interlock Switch for manual operation
- \* Integral Thermal Protection
- \* 30mm Dia. industry standard output shaft
- \* IP 54 Environment Protection
- \* Gear driven Limit Switches
- \* Phosphor bronze Worm Wheel
- \* High Starting Torque Industrial Duty Motor
- \* Integral Brake

Please Contact Our Sales Department On 01928 579050 For Further Information

## PRODUCT DESCRIPTION

The VRL-200 Rolling Door Operator is available with 1.5kw, 400v Three Phase Brake Motor. This model can be fitted with a Hand Crank or Floor Level Hand Chain System which enables the roller shutter door to be manually opened & closed when required.

## TECHNICAL INFORMATION

Data \ Type	VRL-200 3PH c/w Hand Crank	VRL-200 3PH c/w Floor Level Hand Chain
Power (kW)	1.5	1.5
Torque (Nm)	380 / 245	380 / 245
Output Speed (R.P.M.)	24 / 45	24 / 45
Environmental Protection	I.P.54	I.P.54
Current (Amps)	5.4	5.4
Power Supply	400v/3ph/50Hz	400v/3ph/50Hz

## OPERATOR DIMENSIONS:- VRL-200 3ph c/w Floor Level Hand Chain

