


## FEATURES


- Plug & Play With Self Learning Capability
- Economy Stand-by Mode
- Anti-Blocking Software
- Push Open Security Software
- Adjustable Soft-Start / Soft-Stop Facility
- Intermediate Stop Position Facility
- Automatic Close / Open Safety Feature
- Adjustable Operator Speed
- Built-in Memory Retention
- Electronic Limits
- Factory Reset Function
- Error Message Display
- Connection For External Controls Such As:
  - ⇒ *Signal Light*
  - ⇒ *House Alarm*
  - ⇒ *Entry Systems Etc*

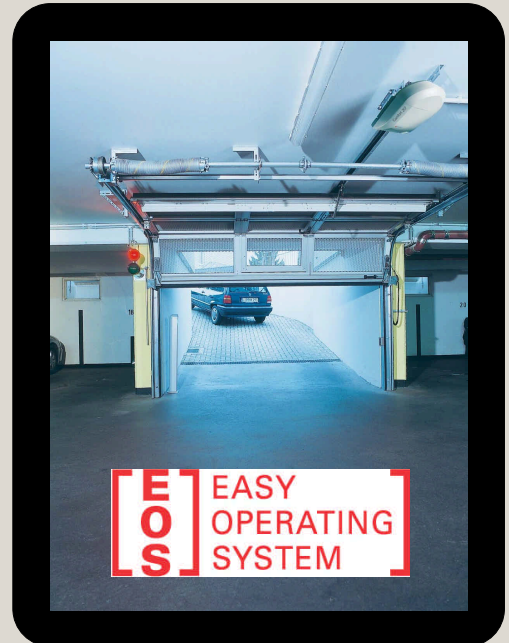

### 100kg Lift Up To 5.0 Metres Wide


#### To Suit:

- |                                 |               |
|---------------------------------|---------------|
| • Up & Over Doors               | Max 3.5m Wide |
| • Single Walled Sectional Doors | Max 5.0m Wide |
| • Double Walled Sectional Doors | Max 3.0m Wide |
| • 16 Operations Per Day         |               |



#### Complete With:


- Two Digital 302 Transmitters
- Mounting Bracket To Suit Up & Over and Sectional Doors



### 175kg Lift Up To 5.5 Metres Wide

#### To Suit:

- |                                      |                            |
|--------------------------------------|----------------------------|
| • Up & Over Doors                    | Max 5.0m Wide              |
| • Single Walled Sectional Doors      | Max 5.5m Wide              |
| • Double Walled Sectional Doors      | Max 5.5m Wide              |
| • Retractable Up & Over/Canopy Doors | Max 5.0m Wide & 2.25m High |
| • 28 Operations Per Day              |                            |




#### Complete With:

- One Digital 302 Transmitter & One Digital 313 Micro Transmitter
- Mounting Bracket To Suit Up & Over and Sectional Doors



**50%** Faster Than 250.2

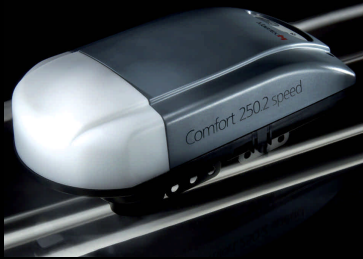

**COMFORT 250.2 SPEED**

## 175kg Lift Up To 5.5 Metres Wide


### To Suit:

- Up & Over Doors Max 5.0m Wide
- Single Walled Sectional Doors Max 5.5m Wide
- Double Walled Sectional Doors Max 5.5m Wide
- Retractable Up & Over/Canopy Doors Max 5.0m Wide & 2.25m High
- 28 Operations Per Day 50% Faster Than 250.2



### Complete With:

- Mounting Bracket To Suit Up & Over and Sectional Doors
- One Digital 302 Transmitter & One Digital 313 Micro Transmitter



**COMFORT 252.2**

## 200kg Lift Up To 6.0 Metres Wide

### To Suit:

- Up & Over Doors Max 6.0m Wide
- Single Walled Sectional Doors Max 6.0m Wide
- Double Walled Sectional Doors Max 6.0m Wide
- Retractable Up & Over/Canopy Doors Max 6.0m Wide & 2.25m High
- 48 Operations Per Day



### Complete With:

- Mounting Bracket To Suit Up & Over and Sectional Doors
- One Digital 302 Transmitter & One Digital 313 Micro Transmitter



**COMFORT 257**

## 200kg Lift Up To 6.0 Metres Wide

### To Suit:

- Up & Over Doors Max 6.0m Wide
- Single Walled Sectional Doors Max 6.0m Wide
- Double Walled Sectional Doors Max 6.0m Wide
- Retractable Up & Over/Canopy Doors Max 6.0m Wide & 2.25m High
- 100 Operations Per Day

### Complete With:

- Pre-Cabled Control x.21 Panel
- Mounting Bracket To Suit Up & Over and Sectional Doors

## TECHNICAL SPECIFICATIONS

Operator	220.2	250.2	250.2 SP	252.2	257
Push Pull Force	600N	800N	800N	1000N	1000N
Door Travel Speed	140mm/Sec	140mm/Sec	220mm/Sec	140mm/Sec	140mm/Sec
Approx. Opening Time	15 Sec	15 Sec	9.5 Sec	15 Sec	18 Sec
Normal Voltage	230V / 50Hz	230V / 50Hz	230V / 50Hz	230V / 50Hz	230V / 50Hz
Control Voltage	24V DC	24V DC	24V DC	24V DC	24V DC
Radio Frequency	868 MHz	868 MHz	868 MHz	868 MHz	868 MHz
Ampage	1.1 A	1.1 A	1.1 A	1.1 A	1.0 A
Watts	0.25 Kw	0.25 Kw	0.25 Kw	0.25 Kw	0.2 Kw